



STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____


JOB NAME: _____

STANDARDS:* Top Rail: 6" Stile: 6" Glass Thickness: 1/4"
 Bottom Rail: 10" Muntin: 1/2"

* Non-Rated Only

Heritage Artistry

SS3032 **SA3032** **SR3032**
 Heritage Only Heritage Only

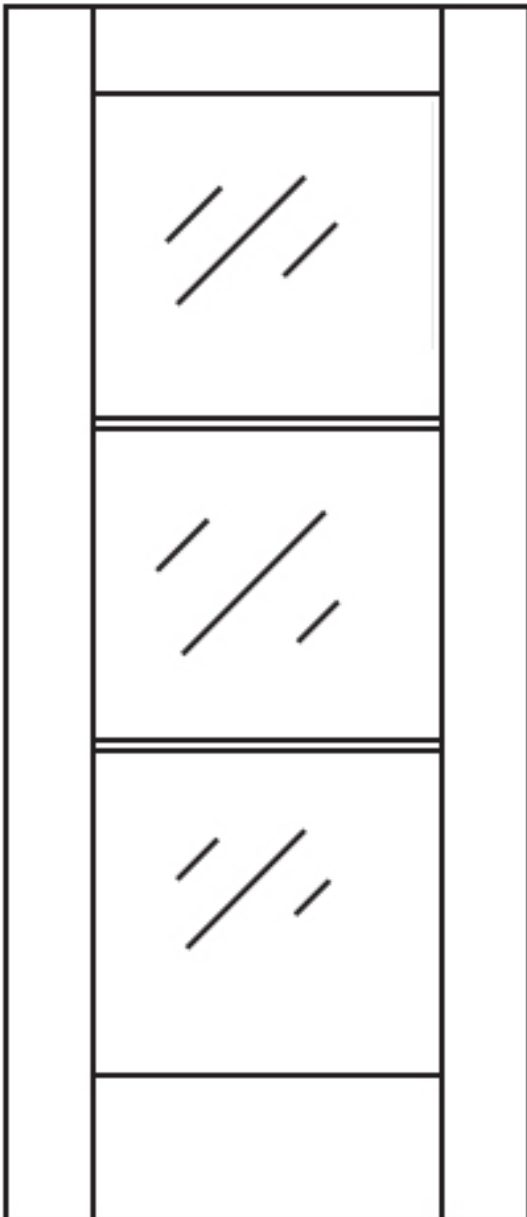

Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: _____ Bottom Rail: _____

Hinge and Lock Stiles: _____
 Glass Opening Dimensions are Equal

Sticking

Heritage Collection

- H1-Ovolo
- H2-Square
- H3-Ogee
- Other - Supply Drawing

Artistry Collection

- A1
- A2
- A3
- A4
- A5
- A6
- A7
- Other- Supply Drawing

Glass**

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass
 Dimensions are to cutout (do not include sticking height). Glass dimensions will vary depending on prefit door size