STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Bottom Rail: 10" Stile: 6" Lock Rail: 8 3/4" Mullion: 3" Glass Thickness: 1/4"

* Standard component dimensions may vary on fire rated doors. Refer to the Stile & Rail Brochure.
(C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

☐ Heritage ☐ Artistry

☐ **SS5031** ☐ **SA5031** ☐ **SR5031**
Heritage Only Heritage Only

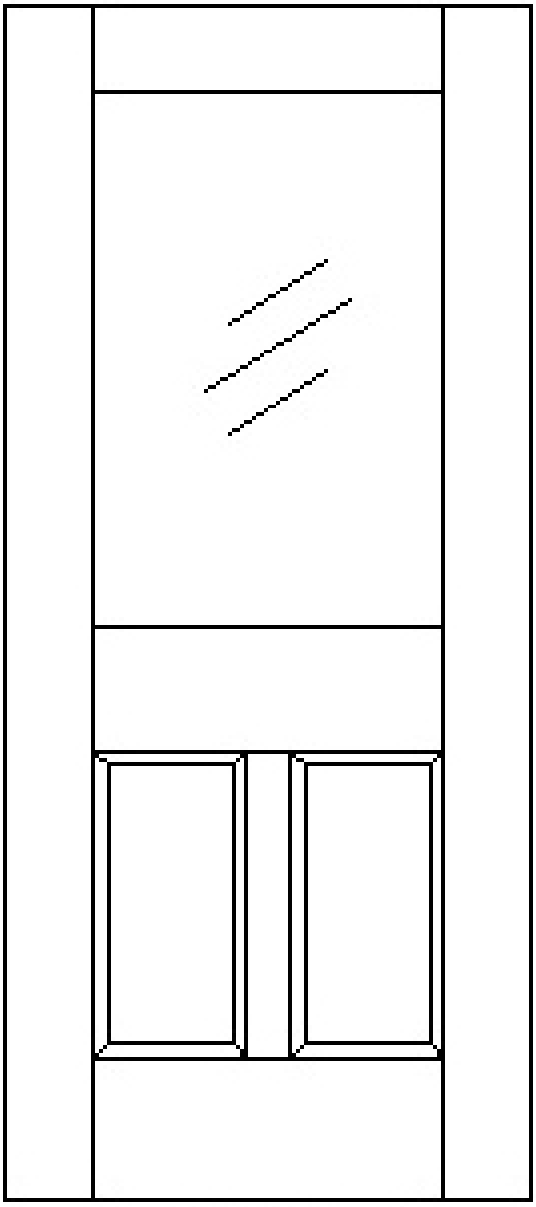

Dimensions

☐ Standard – see above
☐ Custom – fill in below

Top Rail: _____ Bottom Rail: _____

Hinge and Lock Stiles: _____ Mullion: _____

C/L of Lock Rail from TOD: _____ _____
Panel dimensions are equal

Sticking

Heritage Collection
☐ H1-Ovolo
☐ H2-Square
☐ H3-Ogee
☐ Other – Supply Drawing

Panels#
☐ Raised
☐ Flat

Artistry Collection
☐ A1
☐ A2
☐ A3
☐ A4
☐ A5
☐ A6
☐ A7
☐ Other- Supply Drawing

Glass**

Supplied By:	Thickness/Type
☐ VT	☐ 1/4" Tempered*** ☐ 3/16" Clear Firelight® ☐ 1/4" Wire
☐ Other	☐ Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

#Panel dimensions will vary depending on prefit door size
Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size

Rev. 3/11

VT INDUSTRIES INC.
ARCHITECTURAL WOOD DOORS
800.827.1615
WWW.VTINDUSTRIES.COM/DOORS
1000 INDUSTRIAL PARK
P.O. BOX 490
HOLSTEIN, IA 51025