



## STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: \_\_\_\_\_ PAGE: \_\_\_\_\_ / \_\_\_\_\_


JOB NAME: \_\_\_\_\_

STANDARDS:\* Top Rail: 6" Stile: 6" Muntin: 1/2"  
Bottom Rail: 10" Lock Rail: 8 3/4" Glass Thickness: 1/4"

\*Non-Rated Only  
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage  Artistry

**SS5101**

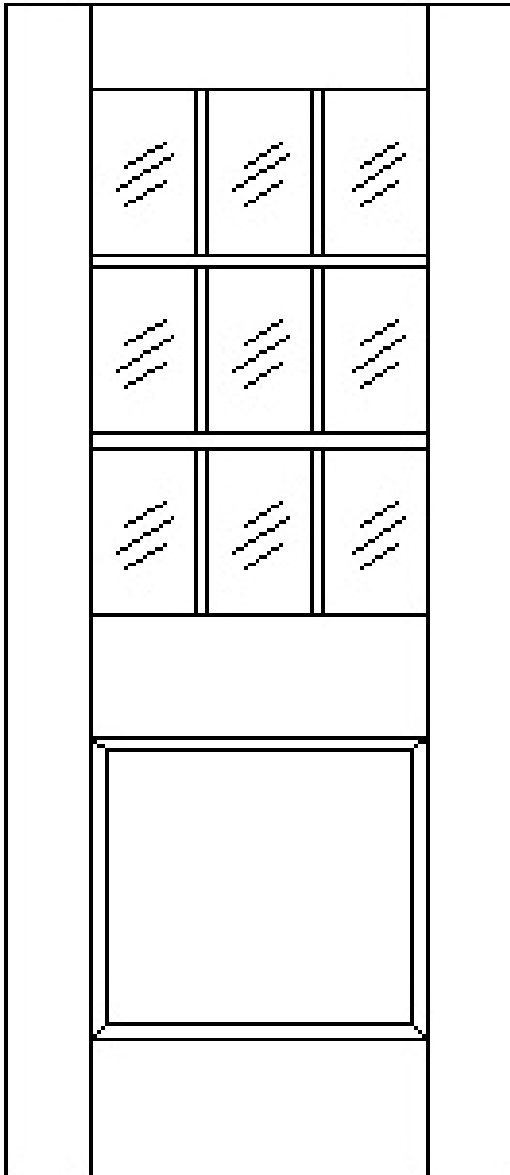

### Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: \_\_\_\_\_

Bottom Rail: \_\_\_\_\_

Hinge and Lock Stiles: \_\_\_\_\_

Lock Rail: \_\_\_\_\_

C/L of Lock Rail from TOD: \_\_\_\_\_

Glass Opening Dimensions are Equal

### Sticking

#### Heritage Collection

- H1-Ovolo
- H2-Square
- H3-Ogee
- Other - Supply Drawing

#### Artistry Collection

- A1
- A2
- A3
- A4
- A5
- A6
- A7
- Other- Supply Drawing

#### Panels<sup>#</sup>

- Raised
- Flat

### Glass\*\*

Supplied By:	Thickness/Type
<input type="checkbox"/> VT <input type="checkbox"/> Other	<input type="checkbox"/> 1/4" Tempered*** <input type="checkbox"/> 1/4" Wire <input type="checkbox"/> Other: _____

\*\*Glass opening dimensions will vary depending on prefit door size  
 \*\*\*If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

<sup>#</sup>Panel dimensions will vary depending on prefit door size  
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size