



STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____


JOB NAME: _____

STANDARDS:*
 Top Rail: 6" Stile: 6" Muntin: 1/2"
 Bottom Rail: 10" Mullion: 3" Lock Rail: 8 3/4"
 Glass Thickness: 1/4"

*Non-Rated Only
 (C/L of Lock Rail location will match frame manufacturer standard C/L of strike location unless otherwise noted)

Heritage Artistry

SS5111

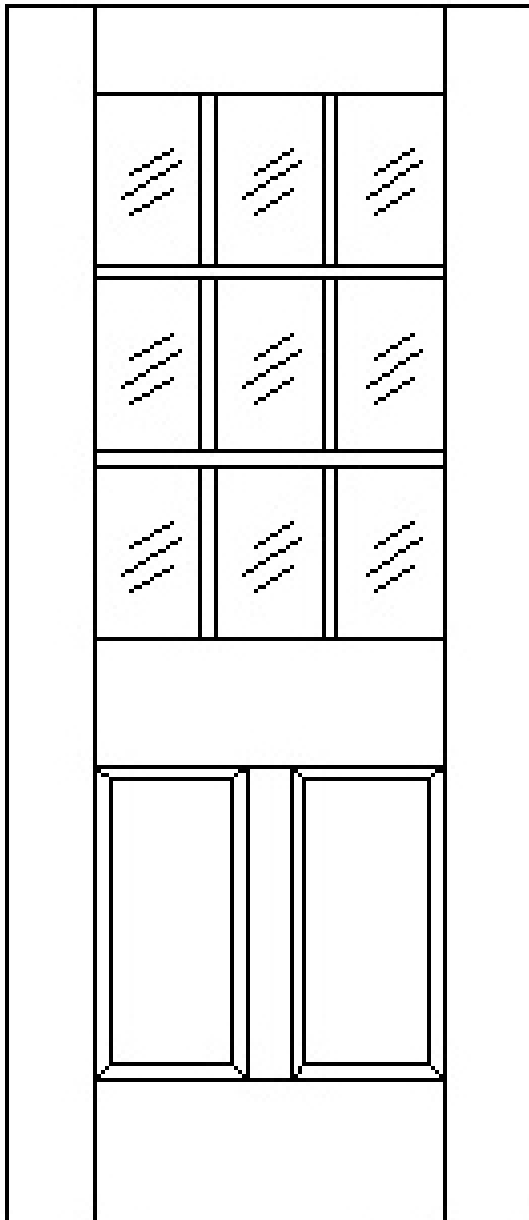

Dimensions

- Standard - see above
- Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Mullion: _____

Lock Rail: _____

C/L of Lock Rail from TOD: _____

Panel Dimensions are Equal

Glass Opening Dimensions are Equal

Sticking

Heritage Collection

- H1-Ovolo
- H2-Square
- H3-Ogee
- Other - Supply Drawing

Artistry Collection

- A1
- A2
- A3
- A4
- A5
- A6
- A7
- Other- Supply Drawing

Panels#

- Raised
- Flat

Glass**

Supplied By:	Thickness/Type	
<input type="checkbox"/> VT	<input type="checkbox"/> 1/4" Tempered***	<input type="checkbox"/> 1/4" Wire
<input type="checkbox"/> Other	<input type="checkbox"/> Other: _____	

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

#Panel dimensions will vary depending on prefit door size
 Dimensions are to cutout (do not include sticking height). Panel and glass dimensions will vary depending on prefit door size